


CULTEC 20L POLYLINER TO BE PLACED UNDER ALL CHAMBERS UTILIZING INTERNAL MANIFOLD FEATURE - MIN. 8 FT.

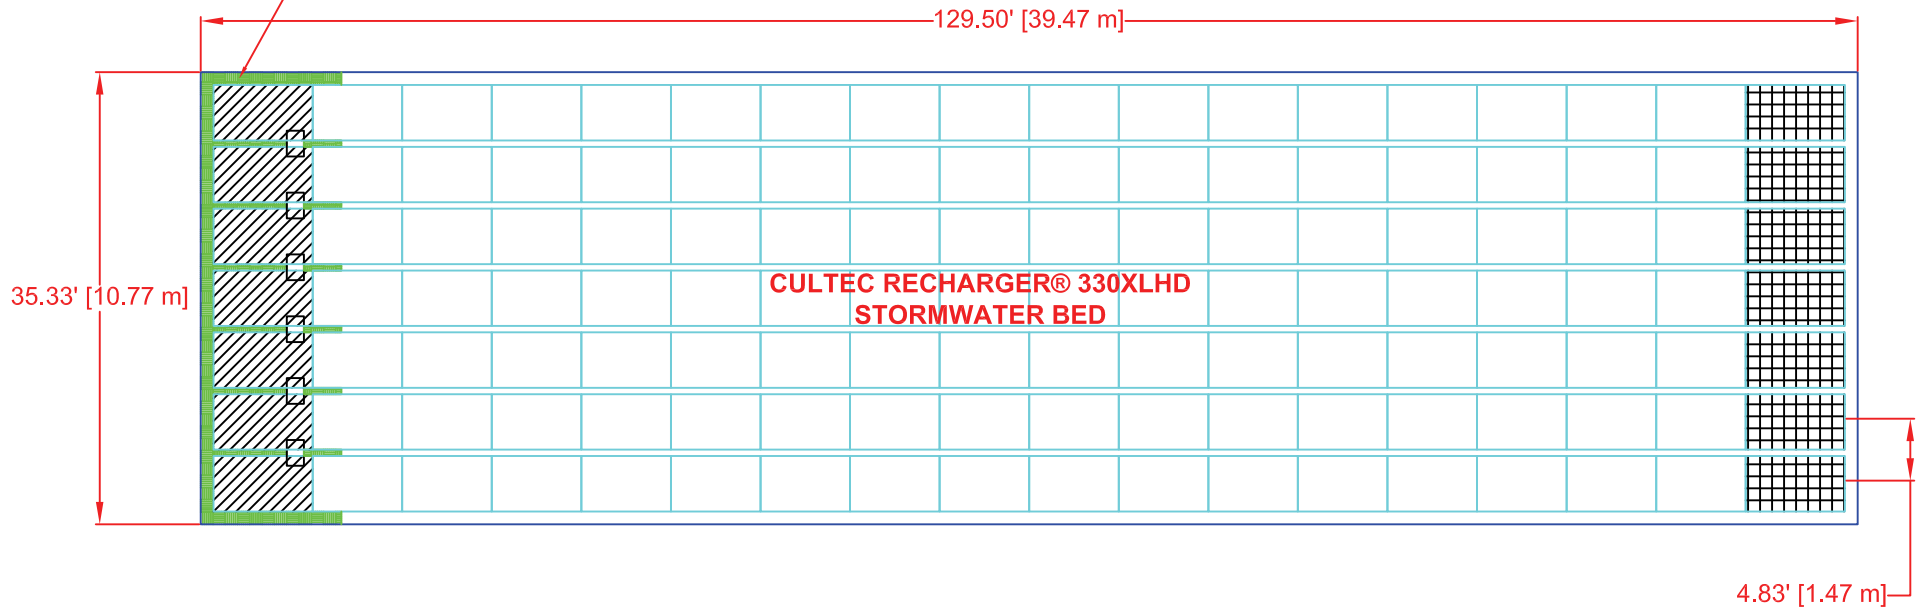






MATERIALS LIST

DESCRIPTION	UNIT	QUANTITY
RECHARGER 330XLSHD STARTER	PIECES	7
RECHARGER 330XLHD INTERMEDIATE	PIECES	112
RECHARGER 330XLEHD END	PIECES	7
HVLV FC-24 FEED CONNECTORS	PIECES	6
CULTEC NO. 410 FILTER FABRIC	SQUARE YARDS	1295
CULTEC NO. 20L POLYETHYLENE LINER	LINEAL FEET	35
1 1/2" - 2" DIAMETER BROKEN STONE	TONS	495
VOLUME OF EXCAVATION	CUBIC YARDS	741

CULTEC RECHARGER® 330XLHD

LEGEND

-  RECHARGER 330XLSHD STARTER
-  RECHARGER 330XLHD INTERMEDIATE
-  RECHARGER 330XLEHD END
-  HVLV FC-24 FEED CONNECTORS
-  CULTEC NO. 20L POLYETHYLENE LINER

**CULTEC STORMWATER MANAGEMENT SYSTEM**

**STORAGE REQUIRED: 10000.00 c.f.**

**STORAGE PROVIDED: 10476.49 c.f.**



**CULTEC, Inc.**

Subsurface Stormwater Management Systems  
P.O. Box 280  
878 Federal Road  
Brookfield, CT 06804

PH: (203) 775-4416  
PH: (800) 4-CULTEC  
FX: (203) 775-1462

THIS DRAWING AND ALL INFORMATION CONTAINED HEREIN IS AUTHORIZED FOR USE ONLY BY THE PARTY FOR WHOM THE WORK WAS CONTRACTED OR TO WHOM IT IS CERTIFIED. THIS DRAWING MAY NOT BE COPIED, REFUSED, DISCLOSED, DISTRIBUTED OR RELIED UPON FOR ANY OTHER PURPOSE WITHOUT THE WRITTEN CONSENT OF CULTEC, INC. THE DRAWING AND DESIGN SHOWN HEREIN ARE AN EXPRESSION OF PROFESSIONAL OPINION BY CULTEC, INC. BASED ON THEIR BEST KNOWLEDGE, INFORMATION AND BELIEF, AS SUCH IT CONSTITUTES NEITHER A GUARANTEE NOR WARRANTY. ALL PLANS FOR CONSTRUCTION ARE TO BE REVIEWED AND APPROVED BY A LICENSED PROFESSIONAL ENGINEER.

TITLE BLOCK

XX  
XX  
XX

CULTEC RECHARGER

PROJECT NO: 09-	DATE: 2009
DESIGNED BY: CULTEC, INC.	DRAWN BY: TECH
SCALE: N.T.S.	SHEET NO: 1 OF 1